

GJ-03R

Geopal GJ-03R Control and Power Unit

The gas alarm monitor type GJ-03R is used where multiple detection points are needed, requiring three or more gas detectors.

The modular construction is placed in a 19" rack for mounting in a steel cabinet. It includes control units (watchdog and common unit), line units, relay circuits, power supply and detectors. As an option, we can offer separate relays for the individual lines/detectors. The alarm monitor is available in four standard sizes: 1-9, 1-19 and 1-29 line units/detectors.

The monitor is designed to receive and process the signal from the connected detectors, carry out the necessary signal processing, and set off the gas warning and gas alarm. The relay circuits facilitate the operation of external functions like ventilation systems, magnet valves, cutting off the power supply, etc.

The power supply is available with or without UPS.

As an option, the line units are available with a display.

The alarm monitor is fitted with a comprehensive fault-finding circuit with associated light and sound indicators.

The GJ-03R system is DIFT certified.




Geopal GJ-03R
Multi-line gas alarm
monitor for connection of
as many as 99 detectors



Geopal GJ-EX
Gas detector for
installation in zones 1 &
2. ATEX certified



Geopal GJ-C
Gas detector for
Installation in non-
classified areas

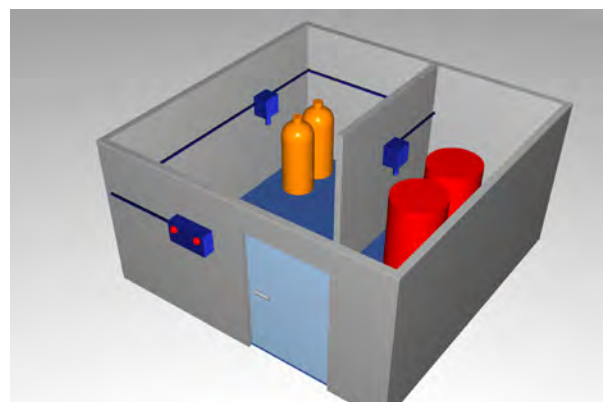

geopal[®]

Bygmarken 19 • DK-3520 Farum
+45 4567 0600 • info@geopal.dk • www.geopal.dk

EA 5506GE



PENDING



ITS-123ATEXQ36745



DBI reg. no 233.301



DIC444QMS

GJ-03R

Supply voltage	230V AC, 110V AC, 12V DC, 24V DC			
Power consumption	According to number of detectors (60W for 9 lines)			
Available gases	Methane, Propane, Butane, Hydrogen, Hexane, Benzene, Ethane, Ethylene, R404A, Carbon, Monoxide, R407C, R22, R134A, Ammonia, etc.			
Detection range	0-100 % LEL, 0-40.000 ppm			
Response time T90	< 5 seconds, depending on gas type			
Calibration	Calibrated to specified type of gas/refrigerant			
Repeatability	+/- 5 %			
Long-term stability	< 5 % FAS / 12 months			
Relay contacts	Low and high alarm level, and system fault Max. load 230 V A.C., 10 A			
Analogue output	4-20 mA / 0 mA = fault, or 0-5V or 0-10V			
Cable between detector and Central Unit	3-conductor 1 or 1.5 mm ² shielded			
Cabinet	Steel (standard)			
Front panel	Dull green, lacquered aluminum with lithographic print			
Indicators	Green, red, and yellow LED. Sounder (option)			
IP rating	IP 55 DIN 40050 depending on choice of cabinet			
Mechanical dimensions	LxWxD mm:	Rack 1-9 345 x 600 x 373	Rack 1-19 478 x 600 x 373	Rack 1-29 612 x 600 x 373
Operating temperature	-10 °C to +50 °C			
Approvals (Directives and Standards)	Electromagnetic Compatibility Directive (EMC) 2014/30/EU Low Voltage Directive 2014/35/EC EN 60 204-1; EN 61 010-1; EN 61 326-1 (2013); EN 61 000-6-2 (2005); EN 61 000-6-3 (2012); EN 50 270 (2015) MED directive 961981 IACS E10: 2006; IEC 60 945:2002 and Corrigendum 1: 2008 IEC 60 092-504:2001-03; IEC 60 533:1999-11			
Quality	ISO 9001:2015			

geopal[®]

Bygmarken 19 • DK-3520 Farum
+45 4567 0600 • info@geopal.dk • www.geopal.dk

EA 5506GE



PENDING

ITS-I 23ATEXQ36745


DBI reg. no 233.301

DIC444QMS

GJ-03R

GJ-EX

The GJ-EX is an explosion-proof detector certified for application in zone 1, made of robust materials, designed for use in hazardous environments. Can be fitted with different sensors according to whatever specific gases/vapours need to be detected.

Operating temperature	-20 °C to +80 °C
Humidity	0-100 % RH, non-condensing
Certification/tests	TÜV 16 ATEX 176482X  II 2G Ex db IIC T5 Gb DBI no. 233.506
IP rating	IP65
Materials	Aluminum/AISI 316L
Mechanical dimensions	LxWxD: 162 x 108 x 95 mm (width without cable gland M20)
Weight	1,5 kg

GJ-C

The GJ-C is used in non-classified areas. It is made of robust materials for application in aggressive environments and can be fitted with different sensors according to whatever specific gases/vapours need to be detected.

Operating temperature	-25 °C to +80 °C
Humidity	0-100 % RH, non-condensing
Certification/tests	DBI no. 233.506 EC project no. 3349D20
IP rating	IP65
Materials	Polycarbonate/POM
Mechanical dimensions	LxWxD: 150 x 80 x 58 mm (length incl. cable gland M20)
Weight	0,25 kg

geopal[®]

Bygmarken 19 • DK-3520 Farum
+45 4567 0600 • info@geopal.dk • www.geopal.dk



PENDING



ITS-123ATEXQ36745



DBI reg. no 233.301



DIC444QMS